


TOPCon N type Mono-crystalline 580-600Watt

0~+5W POWER TOLERANCE

High efficiency TOPCon N - type solar module

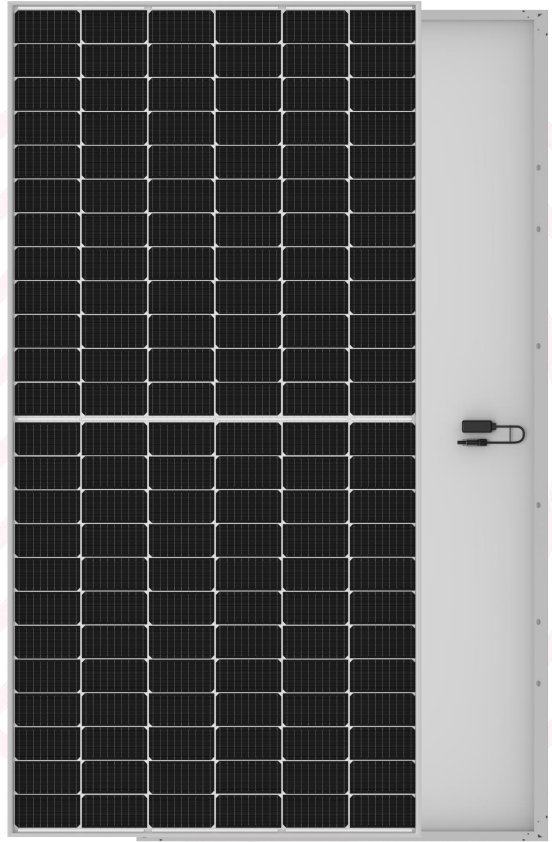

Module characteristics



Strong Mechanical Strength

Pass the wind load test of 2400Mpa and the snow load test of 5400Mpa



Lower attenuation

N-type, good reliability and lower LID/LETID attenuation.



PID resistance

The attenuation probability of PID phenomenon is minimized through solar cell production technology optimization and raw material control.



Harsh environmental adaptation

Robust design for demanding climate conditions.



Multiple busbar and Half cell technique

More light utilization and current collection capabilities, effectively improving product power output and reliability.




Long and reliable quality assurance

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality management system

ISO14001:2015: Environmental management system

ISO45001:2018: Occupational health and safety management system

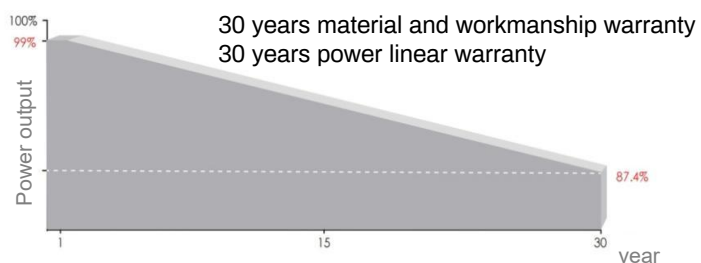


Linear attenuation of 0.4% per year from the 2nd to 30th year.

Electrical Parameters

Model Type	ESM-580T		ESM-585T		ESM-590T		ESM-595T		ESM-600T	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	580	437	585	441	590	445	595	449	600	453
Open Circuit Voltage (Voc)	51.00	48.37	51.14	48.46	51.26	48.54	51.38	48.62	51.46	48.70
Short Circuit Current (Isc)	14.39	11.73	14.46	11.82	14.47	11.89	14.54	11.98	14.61	12.07
Maximum Power Voltage (Vmp)	42.19	39.71	42.27	39.84	42.36	39.91	42.45	39.98	42.54	40.06
Maximum Power Current (Imp)	13.75	11.00	13.84	11.07	13.94	11.15	14.02	11.23	14.10	11.31
Module Efficiency - η_m (%)	22.44		22.64		22.83		23.02		23.21	
Operational Temperature	-40°C~+85°C									
Maximum System Voltage	1500VDC									
Maximum Series Fuse Rating	25A									
Power Tolerance	0~+5w									
Temperature Coefficient of Pmax	-0.310%/°C									
Temperature Coefficient of Voc	-0.260%/°C									
Temperature Coefficient of Isc	+0.046%/°C									
Nominal Operating Cell Temperature	45±2°C									
Safety Class	Class II									
Max Load (Front/back)	5400Mpa/2400Mpa									

STC: Irradiance 1000W/m² Cell temperature 25°C Atmospheric quality =1.5
 NOCT: Irradiance 800W/m² Ambient temperature 20°C Atmospheric quality =1.5 Wind speed 1m/S

Mechanical Diagrams

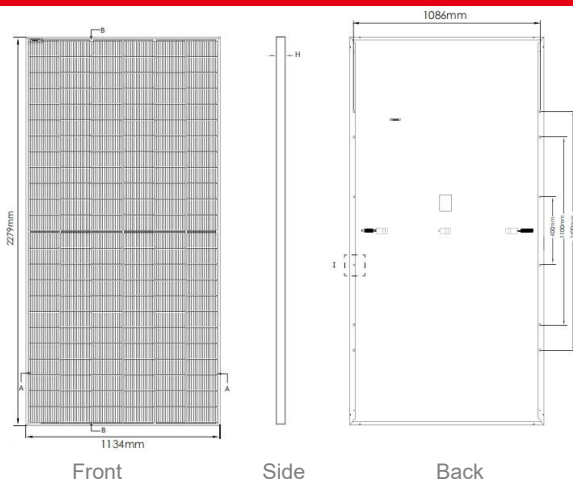

Length: ± 2mm
 Width: ± 2mm
 Thickness: ± 1mm
 Hole pitch: ± 2mm

Packing Details:


36pcs/pallet, Pallet size: 2314×1130×1245mm

40GP: 20 pallets/40HQ, 720pcs/40'HQ

EINNOVA SOLARLINE ENERGY CORP. LIMITED

210000 Nanjing
 PEOPLE'S REPUBLIC OF CHINA
 TEL : +86-25-8479-2033
 Cell: +86-138-13088384
 EMAIL : emma.wu@einnova-solarline.com
 Website: www.einnova-solarline.com

Curve

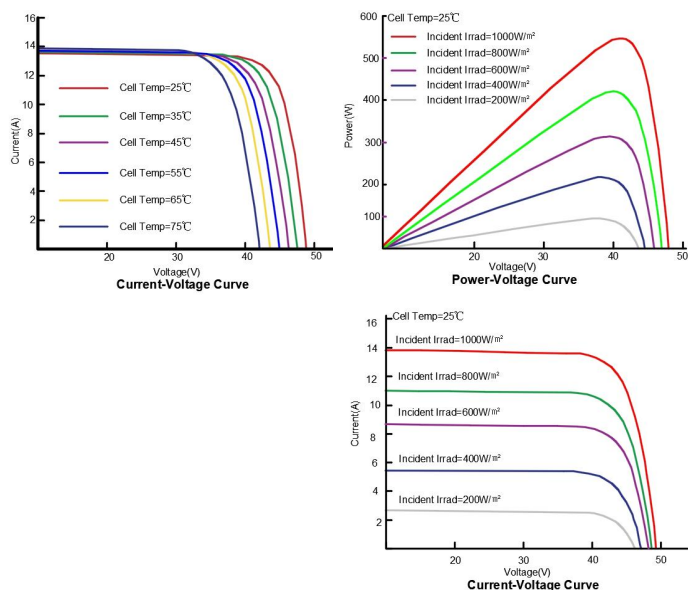

Specification

Cell type	N type mono crystalline
	182.2*183.75mm
Half-cell quantity	144pcs (6×22)
Dimension	2279×1134×30mm
Weight	28kg±3%
Glass	3.2mm, tempered and AR coated
Frame	silver Aluminum Alloy
Junction Box	IP68
Cable	400mm (or customized)

The company reserves the right of final right of adjustment of this file.