


## ESM-260 Luminous PV

**182mm Bifacial  
Luminous Mono  
Half Cell PV Module**

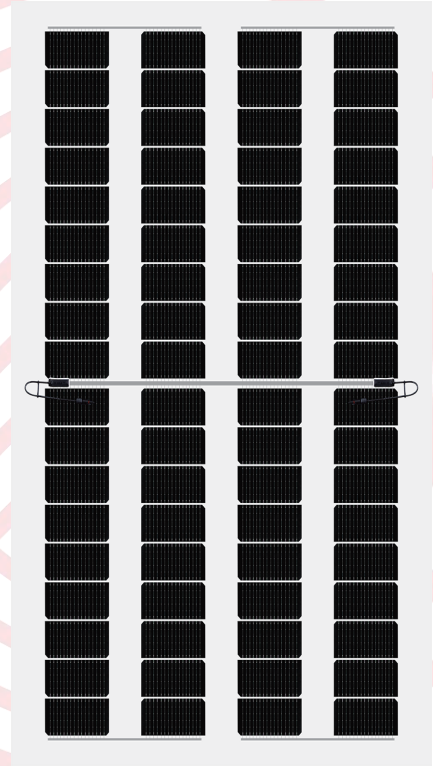

TRANSMITTANCE 40 (%)

### Module characteristics



SMBB Technology  
Half Cut Solar Cell



High Energy  
Performance



100% Inspection  
30years Guarantee



Fire Class A



Strengthened  
Mechanical Load




Advanced Bifacial  
Efficiency




### Long and reliable quality assurance


IEC61215(2016), IEC61730(2016)  
ISO9001:2015: Quality management system  
ISO14001:2015: Environmental management system  
ISO45001:2018: Occupational health and safety management system

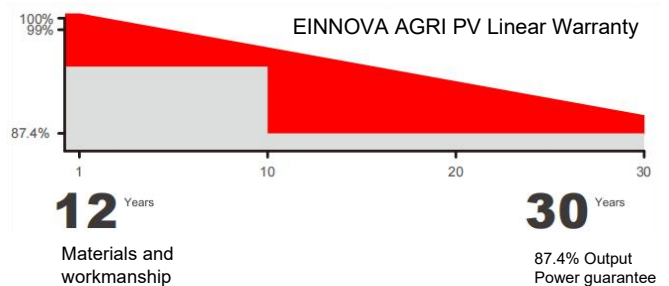

## Mechanical Diagrams

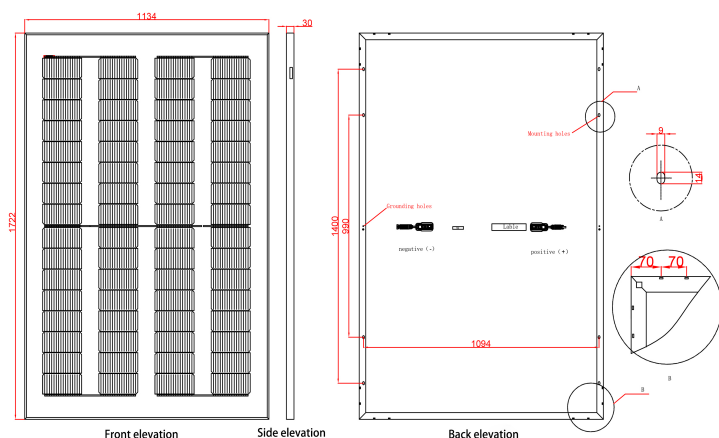

## Curve

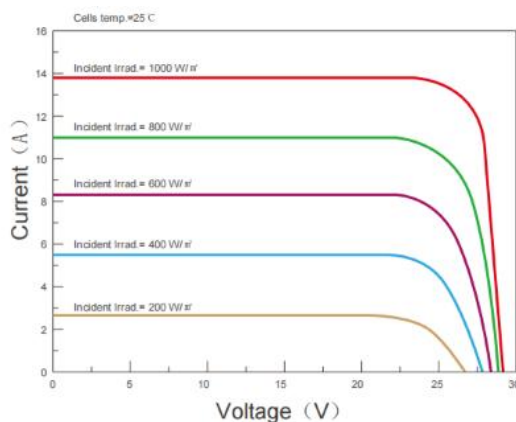

All Dimensions in mm  
The above drawing is a graphical representation of the product.  
For engineering quality drawings please contact EINNOVA.

## Characteristics(STC)

Module Type	ESM-260
	STC
Maximum Power - Pmax(W)	260
Open Circuit Voltage - Voc(V)	23.35
Short-Circuit Current - Isc(A)	13.94
Voltage at Pmax - Vmp(V)	19.59
Current at Pmax - Imp(A)	13.27
Module Efficiency - ηm(%)	9.55
Power Tolerance(W)	(0, +4.99W)
Maximum System Voltage(V)	1500Vdc (IEC)
Maximum Series Fuse Rating (A)	25A

STC : Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass 1.5

## Mechanical Specifications

Dimensions	1722*1134*30mm
Weight	19kgs
Solar Cells	Mono crystalline 182mm (4x16pcs)
Front Glass	3.2mm
Frame	Aluminum Silver Frame
Junction Box	IP67
Output Cables	4.0mm <sup>2</sup> , 100cm (+), 120cm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

## Temperature Characteristics

Pmax Temperature Coefficient	-0.290%/°C
Voc Temperature Coefficient	-0.250%/°C
Isc Temperature Coefficient	+0.045%/°C
Operating Temperature	-40 ~ +85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C

## Packing Configuration

Product size	1716*1128*30mm	
Container	20'GP	40'HQ
Pieces per Pallet	36	36
Pallets per Container	372	936

### EINNOVA SOLARLINE ENERGY CORP. LIMITED

210000 Nanjing  
PEOPLE'S REPUBLIC OF CHINA  
TEL: +86-25-8479-2033  
Cell: +86-138-13088384  
EMAIL: emma.wu@einnova-solarline.com  
Website: www.einnova-solarline.com